

HUBLESS TDMA

FULL MESH VSAT NETWORK

FULL MESH

MF TDMA

MCPC BOOSTER

SW DEFINABLE

1:1 REDUNDANCY

IP ROUTER

UHP Hubless TDMA is a versatile VSAT network, operating without a central Hub. It can support any network topology (star or mesh) and is a good fit for many applications. Every Hubless TDMA station has similar architecture and may communicate with the others over a single-hop satellite link, while one station is designated as master and is responsible for maintaining the timing and allocating bandwidth.

The smallest size Hubless TDMA network consists of only two stations which communicate via a common TDMA carrier. This network can be expanded up to 2 000 sites operating via up to 4 MF-TDMA carriers shared by all stations simultaneously. Such network development does not require any hardware replacement of the existing sites.



Affordability of the equipment combined with highly-efficient utilization of satellite capacity ensures the best total cost of network ownership. Hubless TDMA is also a good choice rational solution for replacement of obsolete SCPC channels; this can significantly boost the total traffic in the system, due to statistical multiplexing of user traffic with sophisticated QoS policies.



Owing to software-definable architecture of the UHP platform, Hubless TDMA technology can be a good entry solution for a private VSAT network, eliminating the need for expensive central infrastructure at an early stage of network rollout. At any time Hubless TDMA network can be remotely switched to TDM/TDMA mode without replacing any hardware or even visiting the sites.



APPLICATIONS

- Air traffic control with real-time voice/video/data
- Video surveillance and border control
- Vide Conferencing and telephony
- Fast-deployable communications
- M2M and SCADA networks
- Backup for terrestrial infrastructure

- Support of various topologies: 'hub and spoke', 'multilevel tree', 'full mesh'
- Innovative MF TDMA protocol with proven efficiency of 96% vs. SCPC
- Various modulations QPSK/8PSK/16PSK and bandwidth-saving LDPC coding
- High-throughput Mesh MF-TDMA: up to 4 carriers with maximum aggregate rate of 8 Msps or 27 Mbps
- Ultra-low latency VSAT system with round-trip delay about 570 ms for TDMA mode of operation
- L2 Bridge and advanced IP router with traffic acceleration and throughput up to 190 000 packets per second
- Support of VLAN, multi-level QoS, codec-independent handling of real-time traffic, TCP acceleration
- Fast network startup — network is ready for use in less than a minute upon power-up
- Minimally required bandwidth is just 120 kHz can be shared by up to 2 000 stations
- Automatic transmission level control ensures superior reliability of communication
- Various hardware models, including compact, integrated, rack-mountable and outdoor versions
- Compatible with majority of C, Ku and Ka-band RF Systems, supplies power and reference signals

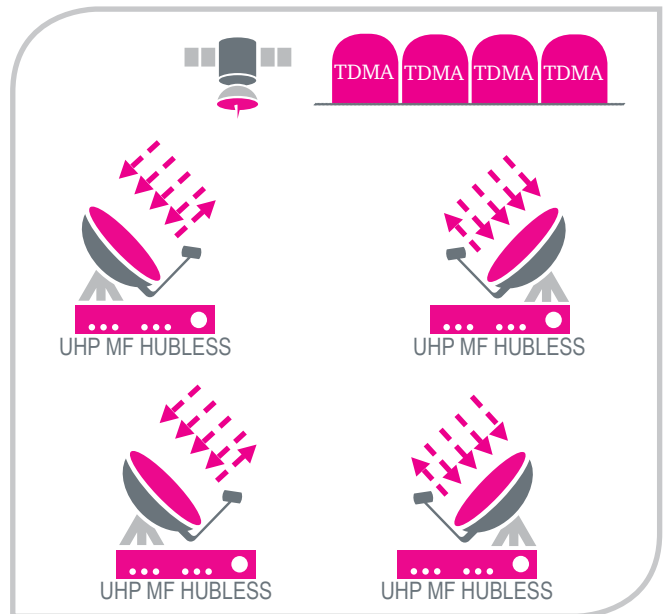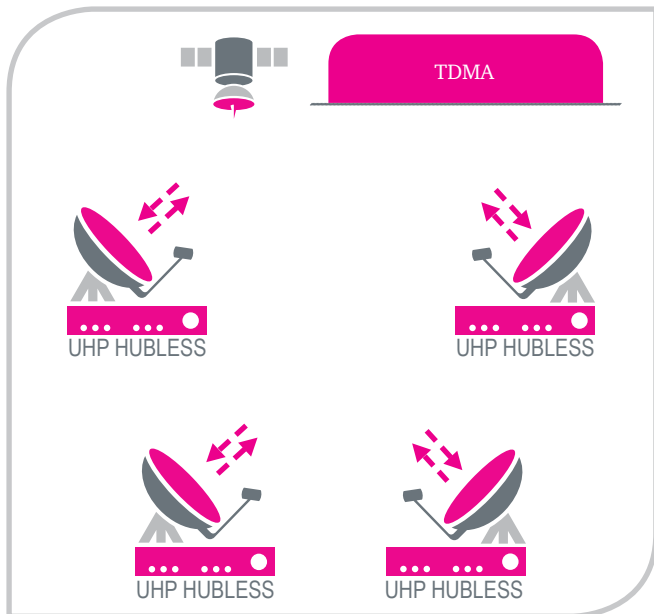

UHP Hubless TDMA network consists of peer stations, one of which is acting as a Master in charge dynamic bandwidth allocation, timing and access control. All the stations transmit and receive data using a shared TDMA carrier or Multi-Frequency TDMA Group (up to 4 carriers within 20 MHz band). This provides the best utilization of satellite bandwidth, which is instantly redistributed between the stations depending on the actual traffic and on the predefined QoS policies. MF TDMA Hubless network allows optimizing required BUC power of the stations.

via the shared TDMA carrier. However, the network is operational if the Master station is able to receive bursts from the other stations, while other stations receive the signal from the Master, i.e. there is no need to ensure the mutual reception of transmission of other stations in-between. Such network will actually operate in a “hub and spoke” topology with the center point at the Master station.

To ensure Full Mesh connectivity of the Hubless TDMA network, its link budget must be calculated so that all the stations receive transmission of other terminals

UHP routers have an additional DVB-S2 demodulator, which is not used when operating in Hubless TDMA mode. It can be used for simultaneous reception of additional overlay carrier, e.g. containing some broadcast or broadband data from the center.

UHP-2XX HUBLESS TDMA SATELLITE ROUTER SPECIFICATIONS

NETWORK		
Topology	Point-to-Point, Star, Full Mesh	
Modes of operation	Hubless MF TDMA; optionally: SCPC, SCPC DAMA, TDM/SCPC, TDM/TDMA Star/Mesh,	
Network role	Hubless Slave or Master	
Frequency bands	C, X, Ku, Ka, including multi-beam HTS satellites	
TDMA CHANNEL	MODULATOR	DEMODULATOR
Standard	LDPC TDMA with Adaptive Code and Modulation	
Channels	One universal SCPC/TDMA modulator	Four-channel MF-TDMA demodulator
Modulation	QPSK, 8PSK, 16PSK; Roll-off: 5%, 20%	QPSK, 8PSK, 16PSK
FEC	1/2, 2/3, 3/4, 5/6	1/2, 2/3, 3/4, 5/6
Symbol Rate	100 ksps - 8 Msps; step 1 ksps	100 ksps - 8 Msps; (8 Msps aggregate for all channels)
Data Rate	67 kbps - 27 Mbps	67 kbps - 27 Mbps
TDMA Protocol	Frame 50 -1000 ms, 14 slot sizes, manageable minimal bandwidth; slot-to-slot fast MF-TDMA hopping	
QoS	8-level prioritization, traffic policies, CIR, MIR, group QoS, hierarchic traffic shaper, FAP	
ROUTER		
Performance	Up to 190 000 packets per second	
Support	DSCP, multiple IP/VLANs, NAT*, proxy ARP, L2 Bridging, TCP Acceleration, Jumbo frames, AES-256	
Protocols	IPv4/IPv6*, IGMP, cRTP, SNMP, RIP, SNTP, TFTP, PPP, DHCP, DHCP Relay	
Management	HTTP interface, SNMP, Telnet, NMS with VNO support	
INTERFACES		
User LAN	2 x Gigabit 10/100/1000 Base-T	
Maintenance console	miniUSB, B female	
IF Rx (two inputs)	950-2150 MHz (LO 10 MHz/+8 dBm [RX2], 13.5/18 VDC 0.75A), F type	
IF Tx	950-1750 MHz (optionally up to 2150 MHz), - 45...-5 dBm, (LO 10 MHz/+8 dBm, 24V/2A), F type	

These specifications are subject to change without notice

* Available in a future SW release



UHP Networks Inc.
 6600 Trans-Canada Highway, Pointe-Claire (Montreal), Quebec, Canada H9R 4S2
 T: +1-514-695-VSAT (8728) | F: +1-514-697-0186 | www.uhp.net | info@uhp.net

